

IN-SITU WATER LEVEL









DATA SERVICES HydroVu™ Data Services:

- Organize multiple projects, users and instruments in one cloud-based location.
- Secure, real-time access to decisionquality data anywhere, anytime.
- Simplify the task of filtering data for important results.

WIRELESS TELEMETRY

- Economical and secure wireless monitoring systems for real-time site feedback.
- In-device alarms, plus automated data, barometric pressure compensation, tampering, and malfunction alerts.
- Compact designs for in-well or networking,depending on your unique monitoring deployment.



W W

W

CONNECT UP

TO 5 DEVICES

Aqua TROLL 200

Level TROLL 700/H

• Vented and non-vented data loggers for every project and budget.

- Fully sealed, titanium design for even the harshest environments.
- Simple setup and data retrieval with field-ready connectors and intuitive software.

Rugged TROLL 200

Level TROLL 400

evel TROLL 500

CONNECT

1 DEVICE

RICE Earth Sciences APPLICATIONS

FROM DATA LOGGERS, TO TELEMETRY, TO DATA SERVICES, IN-SITU IS YOUR ONE-STOP-SHOP FOR THE MOST TRUSTED AND COMPLETE LINE OF WATER MONITORING PRODUCTS AND SERVICES.


In-Situ[®] Inc. is a leading manufacturer of in-situ (on-site) water monitoring instruments for groundwater and surface water applications. Since 1976, we have provided water monitoring markets with innovative solutions, like the smarTROLL[™] Handheld System with the industry's first smartphone application for environmental monitoring.

While we're known for high-accuracy water quantity and quality instrumentation, we also have an expanding portfolio of products and services, including a full-solution offering for decision-quality data via easy integration with our cellular telemetry and cloud-based HydroVuTM Data Services platform.

In-Situ offers a variety of accurate, reliable water level data loggers and meters for any project and budget. Whether you need long-term monitoring or instant results, the fully sealed, solid titanium Level TROLL® family of data loggers are built to last, saving you time and money in the field.

Our easy-to-use instruments, telemetry systems, and data services platform were designed to work together - even the most junior person on your staff can set up and get the data you need, every time. Additionally, the once difficult task of collecting, analyzing, and sharing data is now quick and easy. From your mobile device, to your laptop, to the cloud, your data is exactly where you need it, when you need it.

Our team of experts is ready to help you find the right solution for your project, and our support team is always standing by to offer complimentary 24/7 technical support and mobile help in the field. We're also happy to rent our equipment to you - fully serviced, calibrated, and ready to go.

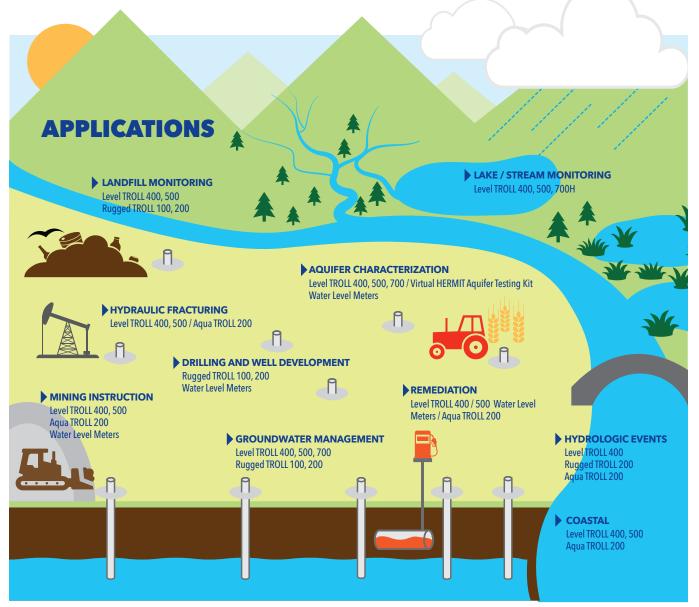

LEVEL TROLL® DATA LOGGERS

Level TROLL® 400 Data Logger



Earth Sciences

Measures and logs water level, water pressure, and temperature in a maintenance-free system ideal for long-term monitoring at flood-prone or high humidity sites. Sub-1 inch diameter.

- Available in non-vented (absolute) pressure ranges up to 1120 ft (341 m)
- Fully sealed, all titanium construction and sensors
- Flexible communication protocols (4-20 mA, SDI-12, RS-485)
- Low-power batteries last 10+ years

Level TROLL® 500 Data Logger

Can-Situ Inc. Level TROLL 500

Our most popular data logger and suited to a wide variety of projects. Continuous measurements of water level, water pressure, and temperature, as well as automatic atmospheric compensation. Sub-1 inch diameter.

- Available in vented (gauged) pressure ranges up to 1153 ft (351 m)
- Fully sealed, all titanium construction and sensors
- Flexible communication protocols (4-20 mA, SDI-12, RS-485)
- Low-power batteries last 10+ years

Level TROLL® 700 Data Logger

Carlos Constitution Level TROLL 700

Premier water level logger featuring higher data resolution, expanded memory, and advanced logging modes for specialized applications. Continuous monitoring of water level, water pressure, and temperature. Sub-1 inch diameter.

- Available in pressure ranges up to 1153 ft (351 m) for vented and 2274 ft (693 m) for non-vented
- Fully sealed, all titanium construction and sensors
- Automatic atmospheric compensation (vented models only)
- Advanced logging modes

Level TROLL® 700H Data Logger

@In-SituInc. LevelTROLL 700 H

The most accurate water level data logger on the market, meeting the USGS surface water specification of ± 0.01 foot. Continuous monitoring of water level, water pressure, and temperature. Sub-1 inch diameter.

- Available in vented (gauged) configuration in pressure ranges up to 35 ft (11 m)
- Automatic atmospheric compensation
- Advanced logging modes
- OSW-Compliant data to meet USGS Office of Surface Water specifications

BaroTROLL® and Rugged BaroTROLL® Data Loggers





Measures and logs the barometric pressure and temperature data needed to compensate for water level changes due to barometric fluctuations.

- Use the BaroTROLL with non-vented (absolute) Level TROLL 400 and 700, or Aqua TROLL 200
- Use the Rugged BaroTROLL with non-vented (absolute) Rugged TROLL 100 and 200 Data Loggers
- Titanium construction and 10-year internal battery
- Software post-corrects multiple data logger files from a single unit





(· ·)
 (· ·)
 (· ·)
 (·)
 (·)
 (·)
 (·)
 (·)

 (·)

 (·)

 (·)

 (·)

 (·)

 (·)

 (·)

 (·)

 (·)

 (·)

 (·)

 (·)

 (·)

 (·)

 (·)

 (·)

 (·)

 (·)

 (·)

 (·)

 (·)

 (·)

 (·)

 (·)

 (·)

 (·)

 (·)

 (·)

 (·)

 (·)

 (·)

 (·)

 (·)

 (·)

 (·)

 (·)

 (·)

 (·)

 (·)

 (·)

 (·)

 (·)

 (·)

 (·)

 (·)

 (·)

 (·)

 (·)

 (·)

 (·)

 (·)

 (·)

 (·)

 (·)

 (·)

 (·)

 <lp>(·)





RUGGED TROLL[®], CTD DATA LOGGERS, AND WATER LEVEL METERS

Rugged TROLL® 100 Data Logger



R CC Earth Sciences

Our most economical option for measuring and logging water level, water pressure, and temperature.

- Available in non-vented (absolute) pressure ranges up to 250 ft (76 m)
- Titanium body with Delrin nose cone and backend
- Ceramic pressure sensor
- Download data via Rugged TROLL Docking Station (sold separately)

Rugged TROLL® 200 Data Logger



Measures and logs water level, water pressure, and temperature, and features a cabled setup for direct read or telemetry data access.

- Available in non-vented (absolute) pressure ranges up to 250 ft (76 m)
- Titanium body with Delrin nose cone and backend
- Ceramic pressure sensor
- Download data via telemetry system, Rugged TROLL Docking Station, or direct-read cable (sold separately)

Aqua TROLL® 100 and 200 Data Loggers



Measure and record water level, water pressure, conductivity, and temperature with the Aqua TROLL 200, or only conductivity and temperature with the Aqua TROLL 100. Unique conductivity cell allows for a wide, accurate measurement range in a narrow diameter instrument (sub-1 inch).

- Full range conductivity with optimum accuracy 5 to 100,000 µS/cm
- Dynamic density compensation on the Aqua TROLL 200
- Copper antifouling conductivity guard available; copper antifouling nose cone also available for the Aqua TROLL 200 only (both sold separately)
- Aqua TROLL 200 is available in pressure ranges up to 1153 ft (351 m) for vented or 1120 ft (341 m) for non-vented

Virtual HERMIT® Aquifer Testing Kit

Connect multiple wells and program all data loggers at once to conduct step-drawdown tests and constant pump rate tests across an entire well field. Available exclusively through In-Situ Rentals.

- Supports up to 15 wells per system
- Simultaneously configures, starts, displays, steps, or stops all connected data loggers
- Allows data downloads while tests are running
- Uses research-grade Level TROLL 700 Data Loggers

Water Level Meters

Durable, easy-to-read tapes and meters in various sizes, probes, and lengths.

- Water Level Meter 100: Economical water level tape with a Kevlar-reinforced polyethylene tape and stainless steel conductors
- Water Level Meter 200: Engineer-grade water level tape with high-tensile steel tape and stainless steel conductors; ASME-certified





10 2 MB

-2"



KEY FEATURES AND ACCESSORIES



ANTIFOULING

Specially formulated copper antifouling guard and/or nose cone combats biofouling in coastal environments and high-fouling sites, improving the accuracy of your data and extending the length of deployment by up to six weeks.



INTERNAL BATTERY POWER

Internally sealed lithium battery power for frequent fast sampling or long-term deployments. External power optional.



INTERNAL MEMORY

Internal 4 MB memory stores up to 250,000 data points, and 2 MB memory stores up to 120,000 data points.



NARROW DIAMETER DESIGN

Compact design fits narrow diameter wells. Sub-1 inch diameter instruments measure 0.72 inches (1.83 cm), and sub-2 inch instruments measure 1.03 inches (2.62 cm).



RUGGED CABLE AND RUGGED TROLL DIRECT-READ CABLE SYSTEMS

Durable, long-lasting cables come in custom lengths and provide real-time communication. Patented twist-lock connectors provide easy, secure attachment and detachment, protecting your investment.



SPECIALIZED LOGGING MODES

Advanced logging modes for specialized applications. In addition to linear, linear average, and event, these products also include step linear, fast linear, and true logarithmic modes.



TELEMETRY CAPABLE

Get real-time feedback from your instruments with cellular device reportingand in-device alarms from the Tube and Cube Telemetry systems. Features include 5+ year battery life, IP68 waterproof rating, optional in-well deployment, automatic barometric compensation, and optional built-in solar panels.

ADDITIONAL ACCESSORIES



TUBING

Polyethylene (PE) or Teflon-lined Polyethylene (TLPE) tubing available in 100 or 500 foot lengths. Silicone pump head tubing, size 15; available in 10, 25, and 500 foot (3.04, 7.62, 152.4 m) lengths.



WELL CAPS

Vented well caps and vented locking well caps for 2 or 4 inch wells. Expandable locking well caps for 2, 3, 4, 6, and 8 inch wells.



BAILERS

Bailers for straight-forward collection and visual examination of water samples in different environments. Available in PVC, Polyurethane (weighted), and biodegradable models, and in 0.7 x 36 inch and 1.5 x 36 inch sizes.

PUMPS

Sampling, peristaltic, submersible, and portable bladder pumps available for rent through In-Situ Rentals.

For our full offering of accessories, please visit www.in-situ.com